


SuperiOtec are used in Telecom, Data Networks and High Speed Networks.

Pigtail Buffer conforms to IEC, EIA/TIA and Telcordia Standards.

The Pigtails are terminated with standard superiOtec connector which gives optimum optical performance.

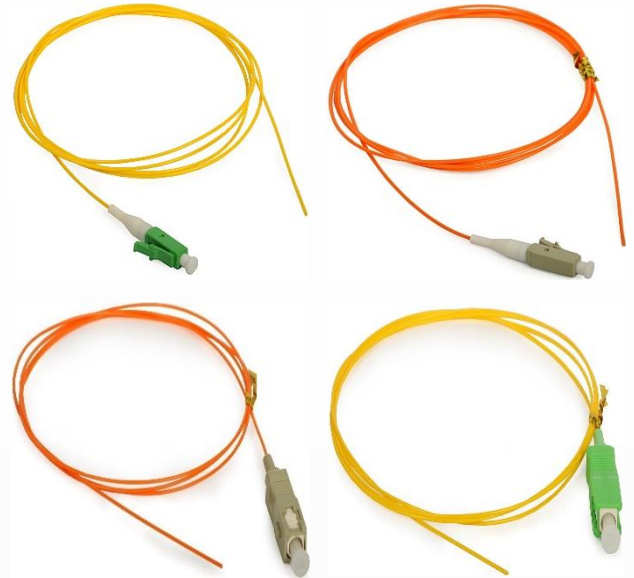

FEATURES & BENEFITS

Low Smoke Zero Halogen (LSZH), Buffer	APC & UPC Connector Option for Singlemode
Available in SC, LC, ST, FC Connector (for SM & MM) and E2000 (for SM)	Different Connector Performance Range for Specific Application
Available in Standard Color as per IEC 60304	900µm Tight Buffer or Easy Strip

FEATURES & BENEFITS

Crush	500N/10dm
Operating Temperature	-20 to 60°C
Nominal Buffer Diameter	900+50 µm
Maximum Tensile Load	6N

ORDERING INFORMATION

P XXX YY ZZ L	Superiortec Pigtails, (XXX) Fiber Type, (YY) Connector Type, (L) LSZH Low Smoke Zero Halogen
XXX:	Fiber Type (801: SM, 502: MM OM2 50/125µm, 503: MM OM3 50/125µm 504: MM OM4 50/125µm)
YY:	Connector Type: SC, LC, ST & FC
ZZ:	Length (in Meters)
L:	Low Smoke Zero Halogen (LSZH)
Optional:	(PC), (UPC) & (APC) Ultra/Angled Physical Contact