


This fiber optic cable is suitable for FTTH applications. The outlet jacket is made of LSZH (Low Smoke Zero Halogen) material. With two parallel non-metallic strength members, FRP (Fiber Reinforce Plastic).

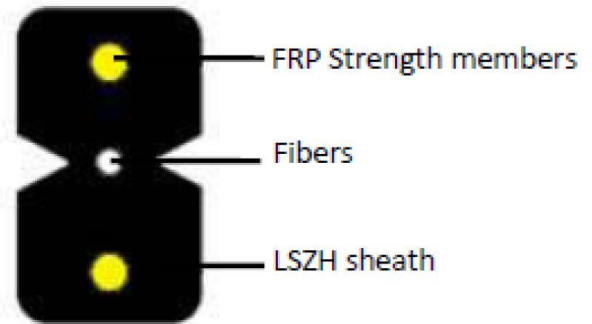

## APPLICATIONS AND CHARACTERISTICS

Small Size and Bending Radius

Easy Install and Terminate

Flame Retardant Outer Sheath

Suitable for FTTH Solutions

In compliance in EU RoHS

## MECHANICAL PROPERTIES

Tensile Strength (Short Term)	70N
Tensile Strength (Long Term)	30N
Crush Resistance (Short Term)	1,000N
Crush Resistance (Long Term)	300N
Minimum Bending Radius (Dynamic)	30mm
Minimum Bending Radius (Static)	15mm

## PHYSICAL SPECIFICATION

Dimensions	3.1mm x 2.0mm
Cable Weight	9.8Kg / Km
Color	Beige
Fiber Count	2-Core
Fiber Type	SM (Singlemode) G.657.A1

## ENVIRONMENTAL SPECIFICATION

Operating Temperature Range	-20°C ~ +70°C
Installation Temperature Range	-5°C ~ +40°C

ORDERING INFORMATION

GJFZY-2

Superior tec 2-Core Indoor Drop Cable FTTH, LSZH, Beige